

Neural-Network-Based Decentralized Adaptive Output-Feedback Control for Large-Scale Stochastic Nonlinear Systems

Qi Zhou, Peng Shi, *Senior Member, IEEE*, Honghai Liu, *Senior Member, IEEE*, and Shengyuan Xu

Abstract—This paper focuses on the problem of neural-network-based decentralized adaptive output-feedback control for a class of nonlinear strict-feedback large-scale stochastic systems. The dynamic surface control technique is used to avoid the explosion of computational complexity in the backstepping design process. A novel direct adaptive neural network approximation method is proposed to approximate the unknown and desired control input signals instead of the unknown nonlinear functions. It is shown that the designed controller can guarantee all the signals in the closed-loop system to be semiglobally uniformly ultimately bounded in a mean square. Simulation results are provided to demonstrate the effectiveness of the developed control design approach.

Index Terms—Adaptive control, backstepping, decentralized control, dynamic surface control, neural network (NN), stochastic nonlinear systems.

I. INTRODUCTION

IN GENERAL, a large-scale system is often considered as a set of interconnected dynamical systems, which comprise some lower order subsystems [1]–[5]. The applications of large-scale systems have been found in many practical systems, such as power systems, computer network systems, and economic systems [6], [7]. The decentralized adaptive technique is often used to handle the control design problems of large-scale systems in that the knowledge of plant parameters and interactions

among subsystems is often unknown and that the decentralized design method depends only on local measurements [8].

In the past two decades, the decentralized control for large-scale systems has received considerable attention (see, for example, [9] and [10] and the reference therein). In [10], the problem of decentralized dynamic surface control of large-scale interconnected systems is investigated. However, most of the results focused on deterministic large-scale systems. Recently, a growing attention has been paid on stochastic systems due to the fact that stochastic disturbance exists in many practical systems and that it is often the source of instability (see, for example, [11]–[25]). More recently, decentralized control design method has been applied to large-scale stochastic nonlinear systems [26], [27], which is crucial for control theory, as well as the synthesis of practical control systems.

On the other hand, the method of approximation-based adaptive fuzzy logic control or neural network (NN) control is useful to approximate the unknown nonlinear functions in the systems, such as the method that has been applied to single-input–single-output nonlinear systems in [28]–[36], multiple-input–multiple-output nonlinear systems in [37]–[40], and large-scale nonlinear systems in [8] and [41]–[44]. In most of these researches, adaptive fuzzy or neural controllers are constructed recursively in the framework of the backstepping approach. However, there exists the open problem of the explosion of complexity in the backstepping design procedure. In order to avoid this problem, the dynamic surface control technique was first introduced in [44] for a class of strict-feedback nonlinear systems with unknown functions. Then, this approach was applied to solve a class of nonlinear systems with periodic disturbances in [45] and a class of interconnected nonlinear systems in [46]. The advantage of dynamic surface control is to avoid repeatedly differentiating the virtual control variables by introducing a first-order filter in each step of backstepping design procedure, which greatly simplifies the traditional backstepping control algorithm. However, there are few results available on neural-network-based decentralized adaptive output-feedback control for large-scale stochastic nonlinear systems. Recently, in [47], the authors investigated the problem of adaptive NN output-feedback decentralized stabilization for a class of large-scale stochastic nonlinear strict-feedback systems. However, the design parameters will increase when the order of the system increases, which motivates our research.

In this paper, the problem of adaptive decentralized NN control is investigated for large-scale stochastic nonlinear system.

Manuscript received August 19, 2011; revised January 3, 2012; accepted March 22, 2012. Date of publication May 17, 2012; date of current version November 14, 2012. This work is supported in part by the Engineering and Physical Sciences Research Council U.K. under Grant EP/G041377/1 and Grant EP/F029195, by the National Science Foundation of China under Grant 61074008, Grant 61174058, and Grant 61104117, by the Natural Science Foundation of Jiangsu Province, China, under Grant BK2008047, and by the Qing Lan Project and the Specialized Research Fund for the Doctoral Program of Higher Education under Grant 20113219110026. This paper was recommended by Associate Editor E. Santos, Jr.

Q. Zhou is with the Intelligent Systems and Biomedical Robotics Group, School of Creative Technologies, University of Portsmouth, PO1 2DJ Portsmouth, U.K., and also with the School of Automation, Nanjing University of Science and Technology, Nanjing 210094, China (e-mail: zhouqi2009@gmail.com).

P. Shi is with the Department of Computing and Mathematical Sciences, University of Glamorgan, CF37 1DL Pontypridd, U.K., and also is with the School of Engineering and Science, Victoria University, Melbourne, Vic. 8001, Australia (e-mail: peng.shi@vu.edu.au).

H. Liu is with the Intelligent Systems and Biomedical Robotics Group, School of Creative Technologies, University of Portsmouth, PO1 2DJ Portsmouth, U.K. (e-mail: honghai.liu@port.ac.uk).

S. Xu is with the School of Automation, Nanjing University of Science and Technology, Nanjing 210094, China. (e-mail: sxyu02@yahoo.com.cn).

Digital Object Identifier 10.1109/TSMCB.2012.2196432

It is assumed that only the output of the system is measurable, and there exist unknown nonlinear functions in the systems; therefore an observer-based adaptive NN controller is designed via the backstepping approach. The proposed control method is independent of the prior knowledge of the basis functions of the neural approximators. The main contributions of this paper can be summarized as follows: 1) The approximation-based direct adaptive NN method can solve the decentralized control design problem of the large-scale stochastic nonlinear systems, in which only one adaptation parameter is required, and therefore, the computation burden is greatly reduced; 2) when the state variable information is unknown, decentralized output-feedback control method is proposed to investigate the control design issue for large-scale stochastic nonlinear systems; and 3) in the control design process, the dynamic surface control approach can be utilized to simplify the problem of the explosion of complexity in large-scale nonlinear stochastic systems, which avoids repeated differentiation of the virtual controller by introducing a first-order filter in each step of the backstepping design procedure. It is shown that the proposed control method can guarantee all the signals in the closed-loop system to be semiglobally uniformly ultimately bounded. Finally, a simulation result illustrates the effectiveness of the proposed method. The rest of this paper is organized as follows. The problem to be addressed is formulated in Section II, and controller design is presented in Section III. A design example is provided in Section IV to show the effectiveness of the developed results, and we conclude this paper in Section V.

II. PROBLEM FORMULATION AND PRELIMINARIES

In this section, the system descriptions are formulated in Section II-A, and the definition of stochastic stability is presented in Section II-B. In Section II-C, the NN is used to approximate the unknown nonlinear functions.

A. System Descriptions

Consider the following nonlinear stochastic system

$$\begin{aligned}
 dx_{i,1}(t) &= (x_{i,2}(t) + f_{i,1}(\bar{x}_{i,1}(t)) + h_{i,1}(y)) dt \\
 &\quad + g_{i,1}(y_i)^T dw_i \\
 &\quad \vdots \\
 dx_{i,n_i-1}(t) &= (x_{i,n_i}(t) + f_{i,n_i-1}(\bar{x}_{i,n_i-1}(t)) + h_{i,n_i-1}(y)) dt \\
 &\quad + g_{i,n_i-1}(y_i)^T dw_i, \\
 dx_{i,n_i}(t) &= (u_i + f_{i,n_i}(\bar{x}_{i,n_i}(t)) + h_{i,n_i}(y)) dt \\
 &\quad + g_{i,n_i}(y_i)^T dw_i, \\
 y_i(t) &= x_{i,1}(t)
 \end{aligned} \tag{1}$$

where $\bar{x}_{i,j}(t) = [x_{i,1}(t), x_{i,2}(t), \dots, x_{i,j}(t)]^T \in R^j$, $i = 1, 2, \dots, N$, $j = 1, 2, \dots, n_i - 1$, and $x_i(t) = [x_{i,1}(t), x_{i,2}(t), \dots, x_{i,n_i}(t)]^T \in R^{n_i}$ denote the state vectors of the system,

and $u_i \in R$ and $y_i \in R$ represent the input and output of the system, respectively. $f_{i,j}(\cdot)$ stands for the unknown smooth system function with $f_{i,j}(0) = 0$. $h_{i,j}(y)$ is the interconnection between the i th subsystem and other subsystems. $g_{i,j}(\cdot)$ is the unknown vector-valued smooth functions with $g_{i,j}(0) = 0$. w_i is an independent r -dimensional standard Wiener process.

Lemma 1: (Young's Inequality). For $\forall (x, y) \in R^2$, the following inequality holds:

$$xy \leq \frac{\varepsilon^p}{p} |x|^p + \frac{1}{q\varepsilon^q} |y|^q$$

where $\varepsilon > 0$, $p > 1$, $q > 1$, and $(p-1)(q-1) = 1$.

Assumption 1: For $1 \leq i \leq N$ and $1 \leq j \leq n_i$, there exists positive unknown constant $p_{i,j}$ such that

$$|h_{i,j}(y)| \leq p_{i,j} \sum_{l=1}^N \varphi_{ijl}(|y_l|)$$

B. Stochastic Stability

Consider the following stochastic system

$$dx(t) = f(x(t)) dt + g(x(t)) dw \tag{2}$$

where $x \in R^n$ is the system state, w is an r -dimensional standard Wiener process, and $f : R^n \rightarrow R^n$ and $g : R^n \rightarrow R^n$ are locally Lipschitz functions and satisfy $f(0) = g(0) = 0$.

Definition 1: For any given $V(x) \in C^2$, which is associated with the stochastic system (2), the infinitesimal generator \mathcal{L} is defined as follows:

$$\mathcal{L}V(x) = \frac{\partial V}{\partial x} f(x) + \frac{1}{2} \text{Tr} \left\{ g(x)^T \frac{\partial^2 V}{\partial x^2} g(x) \right\}$$

where $\text{Tr}(A)$ is the trace of a matrix A .

Definition 2: The trajectory $x(t)$ of system (2) is said to be semiglobally uniformly ultimately bounded in p th moment if, for some compact set $\Omega \in R^n$ and any initial state $x_0 = x(t_0)$, there exist constant $\varepsilon > 0$ and time constant $T = T(\varepsilon, x_0)$, such that $E[|x(t)|^p] < \varepsilon$ for all $t > t_0 + T$. In particular, when $p = 2$, it is usually called semiglobally uniformly ultimately bounded in mean square.

Lemma 2: Consider the stochastic system (2). If there exist functions $V(x) \in C^2$, $\bar{\alpha}_1$, and $\bar{\alpha}_2 \in K_\infty$, and constants $a_0 > 0$ and $b_0 > 0$, such that

$$\begin{aligned}
 \bar{\alpha}_1(x) &\leq V(x) \leq \bar{\alpha}_2(x) \\
 \mathcal{L}V(x) &\leq -a_0 V(x) + b_0
 \end{aligned}$$

then, there is a unique solution of system (2) for each $x_0 \in R^n$, and it satisfies

$$E[V(x)] \leq V(x_0)e^{-a_0 t} + \frac{a_0}{b_0} \quad \forall t > t_0.$$

C. Approximation-Based NN

In this paper, approximation-based NN will be used to approximate the unknown smooth nonlinear functions. For any

continuous unknown smooth nonlinear function $f(Z)$ over a compact set $\Omega_Z \subset R^q$, there exists NN $W^{*T}S(Z)$, such that for a desired level of accuracy ε

$$f(Z) = W^{*T}S(Z) + \delta(Z), \quad |\delta(Z)| \leq \varepsilon \quad (3)$$

where W^* is the ideal constant weight vector and defined by

$$W^* = \arg \min_{W \in R^N} \left\{ \sup_{Z \in \Omega_Z} |f(Z) - W^T S(Z)| \right\}$$

$\delta(Z)$ is the approximation error, $W = [w_1, \dots, w_N]^T$ is the weight vector, and $S(Z) = [s_1(Z), \dots, s_N(Z)]^T$ is the basis function vector with N being the number of the NN nodes and $N > 1$. Radial basis function $s_i(Z) = \exp[-(Z - \mu_i)^T(Z - \mu_i)/\eta_i^2]$, $i = 1, 2, \dots, N$, where $\mu_i = [\mu_{i1}, \mu_{i2}, \dots, \mu_{in}]^T$ is the center of the receptive field and η_i is the width of the Gaussian function.

Remark 1: It is important to note that, although the NNs are universal approximators, it can only be guaranteed within some compact set in the controller design process. Therefore, the stability condition obtained in this paper is semiglobal.

III. CONTROL DESIGN

In this section, an observer-based controller will be designed to guarantee all the signals in the closed-loop system to be semiglobally uniformly ultimately bounded. To estimate the unmeasured states, we propose the following observer:

$$\dot{\hat{x}}_{i,j} = \hat{x}_{i,j+1} + l_{i,j}(y_i - \hat{x}_{i,1}) \quad (4)$$

where $\hat{x}_{i,n_i+1} = u_i$. Let $\tilde{x}_i = x_i - \hat{x}_i$ ($\hat{x}_i = [\hat{x}_{i,1}, \dots, \hat{x}_{i,n_i}]$) be the observer error, which satisfies the following equation:

$$d\tilde{x}_i(t) = (A_i \tilde{x}_i(t) + f_i(\bar{x}(t)) + h_i(y)) dt + g_i(y_i(t))^T dw_i$$

where

$$A_i = \begin{bmatrix} -l_{i,1} & & & \\ \vdots & & I_{n_i-1} & \\ -l_{i,n_i} & 0 \dots & 0 & \end{bmatrix}$$

$$f_i(\bar{x}(t)) = [f_{i,1}(x_{i,1}(t)) \quad \dots \quad f_{i,n_i}(x_{i,n_i}(t))]^T$$

$$h_i(y) = [h_{i,1}(y) \quad \dots \quad h_{i,n_i}(y)]^T$$

$$g_i(y_i) = [g_{i,1}(y(t)) \quad \dots \quad g_{i,n_i}(y(t))]^T$$

and $l_{i,j}$ is to be designed such that A_i is a strict Hurwitz matrix; therefore, there exists matrix $P_i > 0$ satisfying

$$A_i^T P_i + P_i A_i = -I. \quad (5)$$

Then, the entire system can be expressed as

$$\begin{aligned} d\tilde{x}_i(t) &= (A_i \tilde{x}_i(t) + f_i(\bar{x}(t)) + h_i(y)) dt \\ &\quad + g_i(y_i(t))^T dw_i, \\ dy_i(t) &= (\hat{x}_{i,2}(t) + \tilde{x}_{i,2}(t) + f_{i,1}(y_i(t)) + h_{i,1}(y)) dt \\ &\quad + g_{i,1}(y_i)^T dw_i, \\ d\hat{x}_{i,2}(t) &= (\hat{x}_{i,3}(t) + l_{i,2}\tilde{x}_{i,1}(t)) dt, \\ &\quad \vdots \\ d\hat{x}_{i,n_i}(t) &= (u_i + l_{i,n_i}\tilde{x}_{i,1}(t)) dt \end{aligned}$$

where the variables y_i and $\hat{x}_{i,j}$ are available for control design. Now, we introduce a change of coordinates as follows:

$$\begin{aligned} z_{i,1} &= y_i \\ z_{i,j} &= \hat{x}_{i,j} - \alpha_{i,j,f} \end{aligned}$$

where $\alpha_{i,j,f}$ is the output of the first-order filter with $\alpha_{i,j-1}$ as the input. According to Ito's differentiation rule, one can derive

$$\begin{aligned} dz_{i,1} &= (\hat{x}_{i,2}(t) + \tilde{x}_{i,2}(t) + f_{i,1}(y_i) + h_{i,1}(y)) dt \\ &\quad + g_{i,1}(y_i)^T dw_i \\ dz_{i,j} &= (\hat{x}_{i,j+1}(t) + l_{i,j}\tilde{x}_{i,1}(t) - \dot{\alpha}_{i,j,f}) dt \\ &\quad \times I = 1, \dots, N, \quad j = 2, \dots, n_i. \end{aligned}$$

Remark 2: Note that since $g_i(y_i)$ is a smooth function and $g_i(0) = 0$, $g_i(y_i)$ can be expressed as

$$g_i(y_i) = y_i g_i(y_i) = [y_i \bar{g}_{i,1}(y_i), \dots, y_i \bar{g}_{i,n_i}(y_i)].$$

In order to avoid the explosion problem of complexity, dynamic surface control approach will be introduced in the backstepping design procedure. In each step, a virtual control function $\hat{\alpha}_i$ should be developed using an appropriate Lyapunov function V_i , and the real control law u_i will be designed at last. To begin with the backstepping design procedure, let us define constant

$$\theta_i = \max \left\{ N_{i,j} \|W_{i,j}^*\|^2 : j = 0, 1, 2, \dots, n_i \right\}.$$

Let $\hat{\theta}_i$ be the estimate of θ_i . The feasible virtual control signal is designed as

$$\alpha_{i,j}(X_{i,j}) = -\frac{1}{2a_{i,j}^2} z_{i,j}^3 \hat{\theta}_i, \quad j = 1, \dots, n_i - 1 \quad (6)$$

where $X_{i,1} = x_{i,1}$ and $X_{i,j} = (\tilde{x}_{i,1}, \hat{x}_{i,j}, \alpha_{i,j,f}, \dot{\alpha}_{i,j,f})^T$, $j = 2, \dots, n_i - 1$.

Theorem 1: Consider the large-scale stochastic nonlinear system in (1) with observer (4). If a control law is chosen as

$$u_i = -\frac{1}{2a_{i,n_i}^2} z_{i,n_i}^3 \hat{\theta}_i$$

with the intermediate virtual control signals $\alpha_{i,j}$ described as (6) and the adaptive law defined as

$$\dot{\hat{\theta}}_i = \sum_{j=1}^{n_i} \frac{r_i}{2a_{i,j}^2} z_{i,j}^6 - k_{i,0} \hat{\theta}_i \quad (7)$$

where positive constants $a_{i,j}$ ($i = 1, \dots, N, j = 1, \dots, n_i$), r_i , and $k_{i,0}$ are designed parameters, then the closed-loop system can be guaranteed to be semiglobally stable in mean square.

Proof: Step *i*, 1: Consider the Lyapunov functional candidate as follows:

$$V_{i,1} = \frac{a_i}{2} (\tilde{x}_i^T P_i \tilde{x}_i)^2 + \frac{1}{4} z_{i,1}^4 + \frac{1}{2r_i} \tilde{\theta}_i^2$$

where $a_i > 0$ and $\tilde{\theta}_i = \theta_i - \hat{\theta}_i$. By Definition 1, we have

$$\begin{aligned} \mathcal{L}V_{i,1} &= -a_i \tilde{x}_i^T P_i \tilde{x}_i \|\tilde{x}_i\|^2 + a_i \tilde{x}_i^T P_i \tilde{x}_i (2\tilde{x}_i^T P_I (f_i + h_i)) \\ &+ \frac{3}{2} z_{i,1}^2 g_{i,1}(z_{i,1})^T g_{i,1}(z_{i,1}) \\ &+ 2a_i Tr \left\{ g_i(z_{i,1}) (2P_i \tilde{x}_i \tilde{x}_i^T P_i \right. \\ &\quad \left. + \tilde{x}_i^T P_i \tilde{x}_i P_i) g_i(z_{i,1})^T \right\} - \frac{1}{r_i} \tilde{\theta}_i \dot{\hat{\theta}}_i \\ &+ z_{i,1}^3 (\hat{x}_{i,2} + \tilde{x}_{i,2} + f_{i,1}(z_{i,1}) + h_{i,1}(y)). \end{aligned} \quad (8)$$

As $f_i \triangleq (f_{i,1}(\bar{x}), \dots, f_{i,n}(\bar{x}))^T$, and $f_{i,j}(\bar{x})$, where $1 \leq i \leq N$ and $1 \leq j \leq n_i$, is an unknown function, by Lemma 1, for any given $\varepsilon_{ij0} > 0$, there exists NN $W_{ij0}^* S_{i,0}(X_0)$ such that

$$\begin{aligned} f_{i,j}(X_0) &= W_{ij0}^{*T} S_{i,0}(X_0) + \delta_{ij0}(X_0), \\ |\delta_{ij0}(X_0)| &\leq \varepsilon_{ij0} \end{aligned}$$

where $X_0 = \bar{x}$. Therefore

$$\begin{aligned} f_i(X_0) &= W_{i,0}^{*T} S_{i,0}(X_0) + \delta_{i,0}(X_0) \\ \|\delta_{i,0}(X_0)\| &\leq \varepsilon_{i,0}. \end{aligned}$$

As $S_{i,0}^T S_{i,0} \leq N_{i,0}$ is used and $N_{i,0}$ is the dimension of $S_{i,0}$, and according to the definition of θ , we know $\|W_{i,0}^*\|^4 S_{i,0}^4 \leq \theta^2$. Therefore, the following inequality holds:

$$\begin{aligned} 2a_i (\tilde{x}_i^T)^3 \|P_i\|^2 f_i &= 2a_i \tilde{x}_i^3 \|P_i\|^2 (W_{i,0}^{*T} S_{i,0}(X_0) + \delta_{i,0}(X_0)) \\ &\leq \frac{3a_i}{2} \|\tilde{x}_i\|^4 + \frac{a_i}{2} \|P_i\|^8 \|W_{i,0}^*\|^4 S_{i,0}^4 \\ &\quad + \frac{3a_i}{2} \|\tilde{x}_i\|^4 + \frac{a_i}{2} \|P_i\|^8 \delta_{i,0}^4 \\ &= 3a_i \|\tilde{x}_i\|^4 + \frac{a_i}{2} \|P_i\|^8 \theta^2 + \frac{a_i}{2} \|P_i\|^8 \varepsilon_{i,0}^4. \end{aligned} \quad (9)$$

According to Assumption 1, the following inequality holds:

$$\begin{aligned} 2a_i (\tilde{x}_i^T)^3 \|P_i\|^2 h_i &\leq 2a_i \|\tilde{x}_i\|^3 \|P_i\|^2 \|h_i\| \\ &\leq 2a_i \|\tilde{x}_i\|^3 \|P_i\|^2 \sum_{j=1}^{n_i} \sum_{l=1}^N p_{i,j} \varphi_{ijl}(|y_l|) \end{aligned}$$

$$\begin{aligned} &\leq \frac{a_i}{2} \sum_{j=1}^{n_i} \sum_{l=1}^N \varphi_{ijl}^4(|y_l|) \\ &\quad + \frac{3a_i n_i N}{2} p_{i,j}^{\frac{4}{3}} \|P_i\|^{\frac{8}{3}} \|\tilde{x}_i\|^4. \end{aligned} \quad (10)$$

As φ_{ijl} is a smooth function, there exists a smooth nonnegative function $\eta_{ijl}^{(1)}(y_l)$ as follows:

$$\begin{aligned} \frac{a_i}{2} \sum_{j=1}^{n_i} \sum_{l=1}^N \varphi_{ijl}^4(|y_l|) &\leq \sum_{j=1}^{n_i} \sum_{l=1}^N l = 1^N \eta_{ijl}^{(1)}(y_l) y_l^4 \\ &\quad + \sum_{j=1}^{n_i} \sum_{l=1}^N 4a_i \varphi_{ijl}^4(0) \end{aligned} \quad (11)$$

such that From Lemma 1, the terms in (8) lead to

$$\begin{aligned} &2a_i Tr \{ g_i(z_{i,1}) (2P_i \tilde{x}_i \tilde{x}_i^T P_i + \tilde{x}_i^T P_i \tilde{x}_i P_i) g_i(z_{i,1})^T \} \\ &\leq 2a_i n_i \|g_i(z_{i,1}) (2P_i \tilde{x}_i \tilde{x}_i^T P_i + \tilde{x}_i^T P_i \tilde{x}_i P_i) g_i(z_{i,1})^T\| \\ &\leq 6a_i n_i \sqrt{n_i} z_{i,1}^2 \|g_i(z_{i,1})\|^2 \|P_i\|^2 \|\tilde{x}_i\|^2 \\ &\leq \frac{3a_i n_i \sqrt{n_i}}{c_{i,1}^2} z_{i,1}^4 \|\bar{g}_i(z_{i,1})\|^4 + 3a_i n_i \sqrt{n_i} c_{i,1}^2 \|P_i\|^4 \|\tilde{x}_i\|^4 \end{aligned} \quad (12)$$

$$\begin{aligned} &z_{i,1}^3 \tilde{x}_{i,2} \\ &\leq \frac{3}{4} c_{i,2}^{\frac{4}{3}} z_{i,1}^4 + \frac{1}{4c_{i,2}^4} \tilde{x}_{i,2}^4 \\ &\leq \frac{3}{4} c_{i,2}^{\frac{4}{3}} z_{i,1}^4 + \frac{1}{4c_{i,2}^4} \|\tilde{x}_i\|^4 \\ &z_{i,1}^3 h_{i,1}(y) \\ &\leq |z_{i,1}^3| p_{i,1} \sum_{l=1}^N \varphi_{i1l}(|y_l|) \\ &\leq \frac{3}{4} c_{i,3}^{\frac{4}{3}} p_{i,1}^{\frac{4}{3}} z_{i,1}^4 + \left(\sum_{l=1}^N \varphi_{i1l}(|y_l|) \right)^4. \end{aligned} \quad (13)$$

As φ_{i1l} is a smooth function, there exists a smooth nonnegative function $\eta_{i1l}^{(2)}(y_l)$, such that

$$\left(\sum_{l=1}^N \varphi_{i1l}(|y_l|) \right)^4 \leq \sum_{l=1}^N \eta_{i1l}^{(2)}(y_l) y_l^4 + 8 \left(\sum_{l=1}^N \varphi_{i1l}(0) \right)^4.$$

Therefore

$$\begin{aligned} z_{i,1}^3 h_{i,1}(y) &\leq \frac{3}{4} c_{i,3}^{\frac{4}{3}} p_{i,1}^{\frac{4}{3}} z_{i,1}^4 + \sum_{l=1}^N \eta_{i1l}^{(2)}(y_l) y_l^4 \\ &\quad + 8 \left(\sum_{l=1}^N \varphi_{i1l}(0) \right)^4. \end{aligned} \quad (14)$$

Combining (9)–(14) and (8), we have

$$\begin{aligned} \mathcal{L}V_{i,1} \leq & -\Pi_i \|\tilde{x}_i\|^4 + z_{i,1}^3 (\hat{x}_{i,2} + \bar{f}_{i,1}) + \sum_{j=1}^{n_i} \sum_{l=1, l \neq j}^N \eta_{ijl}^{(1)} y_l^4 \\ & + \sum_{l=1, l \neq i}^N \eta_{i1l}^{(2)} y_l^4 + \sum_{j=1}^{n_i} \sum_{l=1}^N 4a_i \varphi_{ijl}^4(0) \\ & + 8 \left(\sum_{l=1}^N \varphi_{i1l}(0) \right)^4 - \frac{1}{r_i} \tilde{\theta}_i \dot{\theta}_i - \frac{3}{4} z_{i,1}^4 \\ & + \frac{a_i}{2} \|P_i\|^8 \theta^2 + \frac{a_i}{2} \|P_i\|^8 \varepsilon_{i,0}^4 \end{aligned}$$

where

$$\begin{aligned} \Pi_i = & a_i \lambda_{\min}(P_i) - 3a_i - \frac{3a_i n_i N}{2} p_{i,j}^{\frac{4}{3}} \|P_i\|^{\frac{8}{3}} \\ & - 3a_i n_i \sqrt{n_i} c_{i,1}^2 \|P_i\|^4 - \frac{1}{4c_{i,2}^4}, \\ \bar{f}_{i,1}(X_{i,1}) = & f_{i,1}(z_{i,1}) \\ & + \left(\frac{3}{4} c_{i,2}^{\frac{4}{3}} + \frac{3}{4} (c_{i,3} p_{i,1})^{\frac{4}{3}} + \sum_{j=1}^{n_i} \eta_{ij}^{(1)} \right. \\ & \left. + \eta_{i1}^{(2)} + \frac{3a_i n_i \sqrt{n_i}}{c_{i,1}^2} \|\bar{g}_i(z_{i,1})\|^4 \right. \\ & \left. + \frac{3}{2} \bar{g}_{i,1}^T(z_{i,1}) \bar{g}_{i,1}(z_{i,1}) + \frac{3}{4} \right) z_{i,1}. \end{aligned}$$

Taking the intermediate control signal $\hat{\alpha}_{i,1}(X_{i,1})$ as

$$\hat{\alpha}_{i,1}(X_{i,1}) = -(k_{i,1} z_{i,1} + \bar{f}_{i,1} + v_{i,1}(z_{i,1}^2) z_{i,1})$$

where $k_{i,1} > 0$. Then, we have

$$\begin{aligned} \mathcal{L}V_{i,1} \leq & -\Pi_i \|\tilde{x}_i\|^4 + z_{i,1}^3 (\hat{x}_{i,2} - \hat{\alpha}_{i,1}) - k_{i,1} z_{i,1}^4 \\ & - v_{i,1}(z_{i,1}^2) z_{i,1}^4 + \sum_{j=1}^{n_i} \sum_{l=1, l \neq j}^N \eta_{ijl}^{(1)} y_l^4 + \sum_{l=1, l \neq i}^N \eta_{i1l}^{(2)} y_l^4 \\ & + \sum_{j=1}^{n_i} \sum_{l=1}^N 4a_i \varphi_{ijl}^4(0) + 8 \left(\sum_{l=1}^N \varphi_{i1l}(0) \right)^4 - \frac{1}{r_i} \tilde{\theta}_i \dot{\theta}_i \\ & - \frac{3}{4} z_{i,1}^4 + \frac{a_i}{2} \|P_i\|^8 \theta^2 + \frac{a_i}{2} \|P_i\|^8 \varepsilon_{i,0}^4. \end{aligned} \quad (15)$$

From the definition of $\hat{\alpha}_{i,1}(X_{i,1})$, we know that it is an unknown nonlinear function because it contains $f_{i,1}(z_{i,1})$ and cannot be implemented in practice. Therefore, according to (3), for any given constant $\varepsilon_{i,1} > 0$, there exists $W_{i,1}^{*T} S_{i,1}(X_{i,1})$ such that

$$\begin{aligned} \hat{\alpha}_{i,1}(X_{i,1}) = & W_{i,1}^{*T} S_{i,1}(X_{i,1}) + \delta_{i,1}(X_{i,1}), \\ |\delta_{i,1}(X_{i,1})| \leq & \varepsilon_{i,1}. \end{aligned}$$

From the definition of θ_i and $\alpha_{i,1}$, we have

$$\begin{aligned} -z_{i,1}^3 \hat{\alpha}_{i,1} = & -z_{i,1}^3 W_{i,1}^{*T} S_{i,1}(X_{i,1}) - z_{i,1}^3 \delta_{i,1}(X_{i,1}) \\ \leq & \frac{N_{i,1}}{2a_{i,1}^2} z_{i,1}^6 \|W_{i,1}^*\|^2 + \frac{1}{2} a_{i,1}^2 + \frac{3}{4} z_{i,1}^4 + \frac{1}{4} \varepsilon_{i,1}^4 \\ \leq & \frac{1}{2a_{i,1}^2} z_{i,1}^6 \theta_i + \frac{1}{2} a_{i,1}^2 + \frac{3}{4} z_{i,1}^4 + \frac{1}{4} \varepsilon_{i,1}^4 \end{aligned} \quad (16)$$

$$z_{i,1}^3 \alpha_{i,1} = -\frac{1}{2a_{i,1}^2} z_{i,1}^6 \hat{\theta}_i \quad (17)$$

where the fact $S_{i,1}^T S_{i,1} \leq N_{i,1}$ can be used and $N_{i,1}$ is the dimension of $S_{i,1}$. Then, substituting (16) and (17) into (15) yields

$$\begin{aligned} \mathcal{L}V_{i,1} \leq & -\Pi_i \|\tilde{x}_i\|^4 + z_{i,1}^3 (\hat{x}_{i,2} - \alpha_{i,1}) - k_{i,1} z_{i,1}^4 \\ & - v_{i,1}(z_{i,1}^2) z_{i,1}^4 + \frac{1}{r_i} \tilde{\theta}_i \left(\frac{r_i}{2a_{i,1}^2} z_{i,1}^6 - \dot{\theta}_i \right) \\ & + \sum_{j=1}^{n_i} \sum_{l=1, l \neq j}^N \eta_{ijl}^{(1)} y_l^4 + \sum_{l=1, l \neq i}^N \eta_{i1l}^{(2)} y_l^4 + \Delta_{i,1}. \end{aligned} \quad (18)$$

where

$$\begin{aligned} \Delta_{i,1} = & \frac{1}{2} a_{i,1}^2 + \frac{1}{4} \varepsilon_{i,1}^4 + \frac{a_i}{2} \|P_i\|^8 \theta^2 + \frac{a_i}{2} \|P_i\|^8 \varepsilon_{i,0}^4 \\ & + \sum_{j=1}^{n_i} \sum_{l=1}^N 4a_i \varphi_{ijl}^4(0) + 8 \left(\sum_{l=1}^N \varphi_{i1l}(0) \right)^4. \end{aligned}$$

Due to $\hat{x}_{i,2} = z_{i,2} + \alpha_{i,2,f}$, (18) can be rewritten as

$$\begin{aligned} \mathcal{L}V_{i,1} \leq & -\Pi_i \|\tilde{x}_i\|^4 + z_{i,1}^3 (z_{i,2} + \alpha_{i,2,f} - \alpha_{i,1}) \\ & - k_{i,1} z_{i,1}^4 - v_{i,1}(z_{i,1}^2) z_{i,1}^4 \\ & + \sum_{j=1}^{n_i} \sum_{l=1, l \neq j}^N \eta_{ijl}^{(1)} y_l^4 + \sum_{l=1, l \neq i}^N \eta_{i1l}^{(2)} y_l^4 \\ & + \frac{1}{r_i} \tilde{\theta}_i \left(\frac{r_i}{2a_{i,1}^2} z_{i,1}^6 - \dot{\theta}_i \right) + \Delta_{i,1}. \end{aligned}$$

To avoid repeatedly differentiating $\alpha_{i,1}$, a new state variable $\alpha_{i,2,f}$ is introduced, and let $\alpha_{i,1}$ pass through a first-order filter with time constant $\kappa_{i,2}$ to obtain $\alpha_{i,2,f}$ as

$$\kappa_{i,2} \dot{\alpha}_{i,2,f} + \alpha_{i,2,f} = \alpha_{i,1}, \quad \alpha_{i,2,f}(0) = \alpha_{i,1}(0).$$

Let $\chi_{i,2} = \alpha_{i,2,f} - \alpha_{i,1}$ be the output error of this filter; then, one has $\dot{\alpha}_{i,2,f} = -\chi_{i,2}/\kappa_{i,2}$ and

$$\dot{\chi}_{i,2} = \dot{\alpha}_{i,2,f} - \dot{\alpha}_{i,1} = -\frac{\chi_{i,2}}{\kappa_{i,2}} + B_{i,2}(X_{i,1})$$

where

$$B_{i,2}(X_{i,1}) = \frac{3}{2a_{i,1}^2} z_{i,1}^2 \dot{z}_{i,1} \hat{\theta}_i + \frac{1}{2a_{i,1}^2} z_{i,1}^3 \dot{\theta}_i.$$

Then, this implies

$$\begin{aligned} \mathcal{L}V_{i,1} \leq & -\Pi_i \|\tilde{x}_i\|^4 + z_{i,1}^3 z_{i,2} + z_{i,1}^3 \chi_{i,2} \\ & -k_{i,1} z_{i,1}^4 - v_{i,1} (z_{i,1}^2) z_{i,1}^4 \\ & + \sum_{j=1}^{n_i} \sum_{l=1, l \neq i}^N \eta_{ijl}^{(1)} y_l^4 + \sum_{l=1, l \neq i}^N \eta_{i1l}^{(2)} y_l^4 \\ & + \frac{1}{r_i} \tilde{\theta}_i \left(\frac{r_i}{2a_{i,1}^2} z_{i,1}^6 - \dot{\theta}_i \right) + \Delta_{i,1}. \end{aligned}$$

Step i, m : ($2 \leq m \leq n_i - 1$). Choose the Lyapunov functional

$$V_{i,m} = V_{i,m-1} + \frac{1}{4} z_{i,m}^4 + \frac{1}{4} \chi_{i,m}^4.$$

Similarly, we have

$$\begin{aligned} \mathcal{L}V_{i,m} \leq & -\Pi_i \|\tilde{x}_i\|^4 + \sum_{j=1}^{m-1} z_{i,j}^3 z_{i,j+1} + \sum_{j=1}^{m-1} z_{i,j}^3 \chi_{i,j+1} \\ & - \sum_{j=1}^{m-1} k_{i,j} z_{i,j}^4 - v_{i,1} (z_{i,1}^2) z_{i,1}^4 \\ & + \sum_{j=1}^{n_i} \sum_{l=1, l \neq i}^N \eta_{ijl}^{(1)} y_l^4 + \sum_{l=1, l \neq i}^N \eta_{i1l}^{(2)} y_l^4 \\ & + \frac{1}{r_i} \tilde{\theta}_i \left(\sum_{j=1}^{m-1} r_i 2a_{i,j}^2 z_{i,j}^6 - \dot{\theta}_i \right) + \Delta_{i,m-1} \\ & - \sum_{j=1}^{m-1} \left(\frac{\chi_{i,j+1}^4}{\kappa_{i,j+1}} - \chi_{i,j+1}^3 B_{i,j+1}(X_{i,j}) \right) \\ & + z_{i,m}^3 (\hat{x}_{i,m+1} + \bar{f}_{i,m}(X_{i,m})) - \frac{3}{4} z_{i,m}^4 \quad (19) \end{aligned}$$

where

$$\bar{f}_{i,m}(X_{i,m}) = l_{i,m} \tilde{x}_{i,1} - \dot{\alpha}_{i,m,f} + \frac{3}{4} z_{i,m}.$$

Take the intermediate control signal $\hat{\alpha}_{i,m}(X_{i,m})$ as

$$\hat{\alpha}_{i,m} = -(k_{i,m} z_{i,m} + \bar{f}_{i,m})$$

where $k_{i,m} > 0$; then, adding and subtracting $\hat{\alpha}_{i,m}(X_{i,m})$ in (19), it yields

$$\begin{aligned} \mathcal{L}V_{i,m} \leq & -\Pi_i \|\tilde{x}_i\|^4 + \sum_{j=1}^{m-1} z_{i,j}^3 z_{i,j+1} + \sum_{j=1}^{m-1} z_{i,j}^3 \chi_{i,j+1} \\ & - \sum_{j=1}^{m-1} k_{i,j} z_{i,j}^4 - v_{i,1} (z_{i,1}^2) z_{i,1}^4 \\ & + \sum_{j=1}^{n_i} \sum_{l=1, l \neq i}^N \eta_{ijl}^{(1)} y_l^4 + \sum_{l=1, l \neq i}^N \eta_{i1l}^{(2)} y_l^4 \end{aligned}$$

$$\begin{aligned} & + \frac{1}{r_i} \tilde{\theta}_i \left(\sum_{j=1}^{m-1} r_i 2a_{i,j}^2 z_{i,j}^6 - \dot{\theta}_i \right) + \Delta_{i,m-1} \\ & - \sum_{j=1}^{m-1} \left(\frac{\chi_{i,j+1}^4}{\kappa_{i,j+1}} - \chi_{i,j+1}^3 B_{i,j+1}(X_{i,j}) \right) \\ & + z_{i,m}^3 (\hat{x}_{i,m+1} + \hat{\alpha}_{i,m}(X_{i,m})) - \frac{3}{4} z_{i,m}^4. \quad (20) \end{aligned}$$

Similarly, $\hat{\alpha}_{i,m}(X_{i,m})$ can be approximated by the NN $W_{i,m}^{*T} S_{i,m}(X_{i,m})$ as

$$\begin{aligned} \hat{\alpha}_{i,m}(X_{i,m}) &= W_{i,m}^{*T} S_{i,m}(X_{i,m}) + \delta_{i,m}(X_{i,m}), \\ |\delta_{i,m}(X_{i,m})| &\leq \varepsilon_{i,m}. \end{aligned}$$

In addition,

$$-z_{i,m}^3 \hat{\alpha}_{i,m} \leq 12a_{i,m}^2 z_{i,m}^6 \theta_i + \frac{1}{2} a_{i,m}^2 + \frac{3}{4} z_{i,m}^4 + \frac{1}{4} \varepsilon_{i,m}^4 \quad (21)$$

$$z_{i,m}^3 \alpha_{i,m} = -\frac{1}{2a_{i,m}^2} z_{i,m}^6 \hat{\theta}_i. \quad (22)$$

Then, by substituting (21) and (22) into (20), we have

$$\begin{aligned} \mathcal{L}V_{i,m} \leq & -\Pi_i \|\tilde{x}_i\|^4 + \sum_{j=1}^{m-1} z_{i,j}^3 z_{i,j+1} + \sum_{j=1}^{m-1} z_{i,j}^3 \chi_{i,j+1} \\ & - \sum_{j=1}^{m-1} k_{i,j} z_{i,j}^4 - v_{i,1} (z_{i,1}^2) z_{i,1}^4 \\ & + \sum_{j=1}^{n_i} \sum_{l=1, l \neq i}^N \eta_{ijl}^{(1)} y_l^4 + \sum_{l=1, l \neq i}^N \eta_{i1l}^{(2)} y_l^4 \\ & + \frac{1}{r_i} \tilde{\theta}_i \left(\sum_{j=1}^m \frac{r_i}{2a_{i,j}^2} z_{i,j}^6 - \dot{\theta}_i \right) + \Delta_{i,m} \\ & - \sum_{j=1}^{m-1} \left(\frac{\chi_{i,j+1}^4}{\kappa_{i,j+1}} - \chi_{i,j+1}^3 B_{i,j+1}(X_{i,j}) \right) \\ & + z_{i,m}^3 (\hat{x}_{i,m+1} + \hat{\alpha}) \quad (23) \end{aligned}$$

where

$$\begin{aligned} \Delta_{i,m} &= \frac{1}{2} \sum_{j=1}^m a_{i,j}^2 + \frac{1}{4} \sum_{j=1}^m \varepsilon_{i,j}^4 \\ & + \frac{a_i}{2} \|P_i\|^8 \theta^2 + \frac{a_i}{2} \|P_i\|^8 \varepsilon_{i,0}^4 \\ & + \sum_{j=1}^{n_i} \sum_{l=1}^N 4a_i \varphi_{ijl}^4(0) + 8 \left(\sum_{l=1}^N \varphi_{i1l}(0) \right)^4. \end{aligned}$$

Next, introduce a new variable $\alpha_{i,m+1,f}$, and let $\alpha_{i,m}$ pass through a first-order filter with the constant $\kappa_{i,m+1}$ to obtain $\alpha_{i,m+1,f}$

$$\kappa_{i,m+1} \dot{\alpha}_{i,m+1,f} + \alpha_{i,m+1,f} = \alpha_{i,m}, \quad \alpha_{i,m+1,f}(0) = \alpha_{i,m}(0).$$

Then, define

$$\chi_{i,m+1} = \alpha_{i,m+1,f} - \alpha_{i,m} \quad (24)$$

as the output error of this filter; we have $\dot{\alpha}_{i,m+1,f} = -(\chi_{i,m+1}/\kappa_{i,m+1})$ and

$$\dot{\chi}_{i,m+1} = \dot{\alpha}_{i,m+1,f} - \dot{\alpha}_{i,m} = -\frac{\chi_{i,m+1}}{\kappa_{i,m+1}} + B_{i,m+1}(X_{i,m}).$$

where

$$B_{i,m+1}(X_{i,m}) = \frac{3}{2a_{i,m}^2} z_{i,m}^2 \dot{z}_{i,m} \hat{\theta}_i + \frac{1}{2a_{i,m}^2} z_{i,m}^3 \dot{\hat{\theta}}_i.$$

Substituting (24) into (23) yields

$$\begin{aligned} \mathcal{L}V_{i,m} \leq & -\Pi_i \|\tilde{x}_i\|^4 + \sum_{j=1}^{m-1} z_{i,j}^3 z_{i,j+1} + \sum_{j=1}^{m-1} z_{i,j}^3 \chi_{i,j+1} \\ & - \sum_{j=1}^{m-1} k_{i,j} z_{i,j}^4 - v_{i,1} (z_{i,1}^2) z_{i,1}^4 \\ & + \sum_{j=1}^{n_i} \sum_{l=1, l \neq i}^N \eta_{ijl}^{(1)} y_l^4 + \sum_{l=1, l \neq i}^N \eta_{i1l}^{(2)} y_l^4 \\ & + \frac{1}{r_i} \tilde{\theta}_i \left(\sum_{j=1}^m \frac{r_i}{2a_{i,j}^2} z_{i,j}^6 - \dot{\hat{\theta}}_i \right) + \Delta_{i,m} \\ & - \sum_{j=1}^{m-1} \left(\frac{\chi_{i,j+1}^4}{\kappa_{i,j+1}} - \chi_{i,j+1}^3 B_{i,j+1}(X_{i,j}) \right). \end{aligned}$$

Step i, n_i : Consider the following Lyapunov functional:

$$V_{i,n_i} = V_{i,n_i-1} + \frac{1}{4} z_{i,n_i}^4 + \frac{1}{4} \chi_{i,n_i}^4.$$

Similarly, we obtain

$$\begin{aligned} \mathcal{L}V_{i,n_i} \leq & -\Pi_i \|\tilde{x}_i\|^4 + \sum_{j=1}^{n_i-1} z_{i,j}^3 z_{i,j+1} + \sum_{j=1}^{n_i-1} z_{i,j}^3 \chi_{i,j+1} \\ & - \sum_{j=1}^{n_i-1} k_{i,j} z_{i,j}^4 + \sum_{j=1}^{n_i} \sum_{l=1, l \neq i}^N \eta_{ijl}^{(1)} y_l^4 \\ & + \sum_{l=1, l \neq i}^N \eta_{i1l}^{(2)} y_l^4 - v_{i,1} (z_{i,1}^2) z_{i,1}^4 \\ & + \Delta_{i,n_i-1} + \frac{1}{r_i} \tilde{\theta}_i \left(\sum_{j=1}^{n_i-1} \frac{r_i}{2a_{i,j}^2} z_{i,j}^6 - \dot{\hat{\theta}}_i \right) \\ & - \sum_{j=1}^{n_i-1} \left(\frac{\chi_{i,j+1}^4}{\kappa_{i,j+1}} - \chi_{i,j+1}^3 B_{i,j+1}(X_{i,j}) \right) \\ & + z_{i,n}^3 (u_i + \bar{f}_{i,n_i}) - \frac{3}{4} z_{i,n_i}^4 \quad (25) \end{aligned}$$

where

$$\bar{f}_{i,n_i}(X_{i,n}) = l_{i,n_i} \tilde{x}_{i,1} - \dot{\alpha}_{i,n_i,f} + \frac{3}{4} z_{i,n_i}.$$

Take the intermediate control signal $\hat{\alpha}_{i,n_i}(X_{i,n_i})$ as

$$\hat{\alpha}_{i,n_i} = -(k_{i,n_i} z_{i,n_i} + \bar{f}_{i,n_i})$$

where $k_{i,n_i} > 0$; then, adding and subtracting $\hat{\alpha}_{i,n_i}(X_{i,n_i})$ in (25) yields

$$\begin{aligned} \mathcal{L}V_{i,n_i} \leq & -\Pi_i \|\tilde{x}_i\|^4 + \sum_{j=1}^{n_i-1} z_{i,j}^3 z_{i,j+1} + \sum_{j=1}^{n_i-1} z_{i,j}^3 \chi_{i,j+1} \\ & - \sum_{j=1}^{n_i} k_{I,j} z_{i,j}^4 + \sum_{j=1}^{n_i} \sum_{l=1, l \neq I}^N \eta_{ijl}^{(1)} y_l^4 \\ & + \sum_{l=1, l \neq i}^N \eta_{i1l}^{(2)} y_l^4 - v_{i,1} (z_{i,1}^2) z_{i,1}^4 + \Delta_{i,n_i-1} \\ & + \frac{1}{r_i} \tilde{\theta}_i \left(\sum_{j=1}^{n_i-1} \frac{r_i}{2a_{i,j}^2} z_{i,j}^6 - \dot{\hat{\theta}}_i \right) \\ & - \sum_{j=1}^{n_i-1} \left(\frac{\chi_{i,j+1}^4}{\kappa_{i,j+1}} - \chi_{i,j+1}^3 B_{i,j+1}(X_{i,j}) \right) \\ & + z_{i,n}^3 (u_i - \hat{\alpha}_{i,n_i}) - \frac{3}{4} z_{i,n_i}^4. \quad (26) \end{aligned}$$

Similar to the above steps, $\hat{\alpha}_{i,n_i}(X_{i,n_i})$ can be approximated by the NN $W_{i,n_i}^{*T} S_{i,n_i}(X_{i,n_i})$ as

$$\begin{aligned} \hat{\alpha}_{i,n_i}(X_{i,n_i}) &= W_{i,n_i}^{*T} S_{i,n_i}(X_{i,n_i}) + \delta_{i,n_i}(X_{I,n_i}), \\ |\delta_{i,n_i}(X_{i,n_i})| &\leq \varepsilon_{i,n_i}. \end{aligned}$$

Following the similar procedure and by the definition of u_i , we have

$$-z_{i,n_i}^3 \hat{\alpha}_{i,n_i} \leq \frac{1}{2a_{i,n_i}^2} z_{i,n_i}^6 \theta_i + \frac{1}{2} a_{i,n_i}^2 + \frac{3}{4} z_{i,n_i}^4 + \frac{1}{4} \varepsilon_{i,n_i}^4 \quad (27)$$

$$z_{i,n_i} u_i = -\frac{1}{2a_{i,n_i}^2} z_{i,n_i}^6 \hat{\theta}_i. \quad (28)$$

Then, by substituting (27) and (28) into (26), we have

$$\begin{aligned} \mathcal{L}V_{i,n_i} \leq & -\Pi_i \|\tilde{x}_i\|^4 + \sum_{j=1}^{n_i-1} z_{i,j}^3 z_{i,j+1} + \sum_{j=1}^{n_i-1} z_{i,j}^3 \chi_{i,j+1} \\ & - \sum_{j=1}^{n_i} k_{i,j} z_{i,j}^4 + \sum_{j=1}^{n_i} \sum_{l=1, l \neq i}^N \eta_{ijl}^{(1)} y_l^4 + \Delta_{i,n_i} \\ & - v_{i,1} (z_{i,1}^2) z_{i,1}^4 + \sum_{l=1, l \neq i}^N \eta_{i1l}^{(2)} y_l^4 \\ & + \frac{1}{r_i} \tilde{\theta}_i \left(\sum_{j=1}^{n_i} \frac{r_i}{2a_{i,j}^2} z_{i,j}^6 - \dot{\hat{\theta}}_i \right) \\ & - \sum_{j=1}^{n_i-1} \left(\frac{\chi_{i,j+1}^4}{\kappa_{i,j+1}} - \chi_{i,j+1}^3 B_{i,j+1}(X_{i,j}) \right) \end{aligned}$$

where

$$\begin{aligned} \Delta_{i,n_i} &= \frac{1}{2} \sum_{j=1}^{n_i} a_{i,j}^2 + \frac{1}{4} \sum_{j=1}^{n_i} \varepsilon_j^4 \\ &+ \frac{a_i}{2} \|P_i\|^8 \theta^2 + \frac{a_i}{2} \|P_i\|^8 \varepsilon_{i,0}^4 \\ &+ \sum_{j=1}^{n_i} \sum_{l=1}^N 4a_i \varphi_{ijl}^4(0) + 8 \left(\sum_{l=1}^N \varphi_{i1l}(0) \right)^4. \end{aligned}$$

By the definition of $\hat{\theta}_i$, we can get

$$\begin{aligned} \mathcal{L}V_{i,n_i} &\leq -\Pi_i \|\tilde{x}_i\|^4 + \sum_{j=1}^{n_i-1} z_{i,j}^3 z_{i,j+1} + \sum_{j=1}^{n_i-1} z_{i,j}^3 \chi_{i,j+1} \\ &- \sum_{j=1}^{n_i} k_{i,j} z_{i,j}^4 + \sum_{j=1}^{n_i} \sum_{l=1, l \neq i}^N \eta_{ijl}^{(1)} y_l^4 + \Delta_{i,n_i} \\ &- v_{i,1}(z_{i,1}^2) z_{i,1}^4 + \sum_{l=1, l \neq i}^N \eta_{i1l}^{(2)} y_l^4 + \frac{k_{i,0}}{r_i} \tilde{\theta}_i \hat{\theta}_i \\ &- \sum_{j=1}^{n_i-1} \left(\frac{\chi_{i,j+1}^4}{\kappa_{i,j+1}} - \chi_{i,j+1}^3 B_{i,j+1}(X_{i,j}) \right). \quad (29) \end{aligned}$$

By utilizing Lemma 1, we have

$$\begin{aligned} z_{i,j}^3 z_{i,j+1} &\leq \frac{3}{4} z_{i,j}^4 + \frac{1}{4} z_{i,j+1}^4, \\ z_{i,j}^3 \chi_{i,j+1} &\leq \frac{3}{4} z_{i,j}^4 + \frac{1}{4} \chi_{i,j+1}^4, \\ |\chi_{i,j+1}^3 B_{i,j+1}| &\leq \frac{3}{4} \pi_i^{\frac{4}{3}} B_{i,j+1}^{\frac{4}{3}} \chi_{i,j+1}^4 + \frac{1}{4\pi_i^4}, \\ \tilde{\theta}_i \hat{\theta}_i = \tilde{\theta}_i(\theta_i - \tilde{\theta}_i) &\leq -\frac{1}{2} \tilde{\theta}_i^2 + \frac{1}{2} \theta_i^2 \quad (30) \end{aligned}$$

where $\pi_i > 0$ is a design constant. Substituting (30) into (29), one has

$$\begin{aligned} \mathcal{L}V_{i,n_i} &\leq -\Pi_i \|\tilde{x}_i\|^4 - \sum_{j=1}^{n_i} \left(k_{i,j} - \frac{7}{4} \right) z_{i,j}^4 \\ &- v_{i,1}(z_{i,1}^2) z_{i,1}^4 - \frac{k_{i,0}}{2r_i} \tilde{\theta}_i^2 + \bar{\Delta}_{i,n_i} \\ &+ \sum_{j=1}^{n_i} \sum_{l=1, l \neq i}^N \eta_{ijl}^{(1)} y_l^4 + \sum_{l=1, l \neq i}^N \eta_{i1l}^{(2)} y_l^4 \\ &- \sum_{j=1}^{n_i-1} \left(\frac{1}{k_{i,j+1}} - \frac{1}{4} - \frac{3}{4} \pi_i^{\frac{4}{3}} B_{i,j+1}^{\frac{4}{3}} \right) \chi_{i,j+1}^4, \\ \bar{\Delta}_{i,n_i} &= \Delta_{i,n_i} + \frac{k_{i,0}}{2r_i} \theta_i^2 + \frac{1}{4\pi_i^4}. \end{aligned}$$

Choose the following Lyapunov functional candidate for the whole system:

$$V_N = \sum_{i=1}^N V_{i,n_i}.$$

According to Definition 1, one has

$$\begin{aligned} \mathcal{L}V_N &\leq -\sum_{i=1}^N \Pi_i \|\tilde{x}_i\|^4 - \sum_{i=1}^N \sum_{j=1}^{n_i} \left(k_{i,j} - \frac{7}{4} \right) z_{i,j}^4 \\ &+ \sum_{i=1}^N \bar{\Delta}_{i,n_i} - \sum_{i=1}^N v_{i,1}(z_{i,1}^2) z_{i,1}^4 - \sum_{i=1}^N \frac{k_{i,0}}{2r_i} \tilde{\theta}_i^2 \\ &+ \sum_{i=1}^N \sum_{j=1}^{n_i} \sum_{l=1, l \neq i}^N \eta_{ijl}^{(1)} y_l^4 + \sum_{i=1}^N \sum_{l=1, l \neq i}^N \eta_{i1l}^{(2)} y_l^4 \\ &- \sum_{i=1}^N \sum_{j=1}^{n_i-1} \left(\frac{1}{k_{i,j+1}} - \frac{1}{4} - \frac{3}{4} \pi_i^{\frac{4}{3}} B_{i,j+1}^{\frac{4}{3}} \right) \chi_{i,j+1}^4. \end{aligned}$$

As

$$\begin{aligned} &\sum_{i=1}^N \sum_{j=1}^{n_i} \sum_{l=1, l \neq i}^N \eta_{ijl}^{(1)} y_l^4 + \sum_{i=1}^N \sum_{l=1, l \neq i}^N \eta_{i1l}^{(2)} y_l^4 \\ &= \sum_{l=1}^N \sum_{j=1}^{n_i} \sum_{i=1, i \neq l}^N \eta_{lji}^{(1)} y_i^4 + \sum_{l=1}^N \sum_{i=1, i \neq l}^N \eta_{l1i}^{(2)} y_i^4 \\ &= \sum_{i=1}^N \sum_{j=1}^{n_i} \sum_{l=1, l \neq i}^N \eta_{lji}^{(1)} y_i^4 + \sum_{l=1}^N \sum_{i=1, i \neq l}^N \eta_{l1i}^{(2)} y_i^4. \end{aligned}$$

Choose a smooth nonnegative function candidate $v_{i,1}$ such that

$$\begin{aligned} \sum_{i=1}^N v_{i,1}(z_{i,1}^2) z_{i,1}^4 - \sum_{i=1}^N \sum_{j=1}^{n_i} \sum_{l=1, l \neq i}^N \eta_{lji}^{(1)} z_{i,1}^4 \\ - \sum_{i=1}^N \sum_{l=1, l \neq i}^N \eta_{l1i}^{(2)} z_{i,1}^4 \geq 0. \end{aligned}$$

Then,

$$\begin{aligned} \mathcal{L}V_N &\leq -\sum_{i=1}^N \Pi_i \|\tilde{x}_i\|^4 - \sum_{i=1}^N \sum_{j=1}^{n_i} \left(k_{i,j} - \frac{7}{4} \right) z_{i,j}^4 \\ &- \sum_{i=1}^N k_{i,0} 2r_i \tilde{\theta}_i^2 + \sum_{i=1}^N \bar{\Delta}_{i,n_i} \\ &- \sum_{i=1}^N \sum_{j=1}^{n_i-1} \left(\frac{1}{k_{i,j+1}} - \frac{1}{4} - \frac{3}{4} \pi_i^{\frac{4}{3}} B_{i,j+1}^{\frac{4}{3}} \right) \chi_{i,j+1}^4. \end{aligned}$$

Let

$$\Pi_i > 0$$

and denote

$$\begin{aligned} c_I &= \min_{1 \leq j \leq n_i} \left\{ \frac{2\Pi_i}{a_I \lambda_{\max}^2(P_i)}, 4 \left(k_{i,j} - \frac{7}{4} \right), \right. \\ &\quad \left. 4 \left(\frac{1}{k_{i,j+1}} - \frac{1}{4} - \frac{3}{4} \pi_i^{\frac{4}{3}} B_{i,j+1}^{\frac{4}{3}} \right), k_{i,0} \right\}; \\ c &= \min\{c_1, \dots, c_N\}, \\ d &= \sum_{i=1}^N \bar{\Delta}_{i,n_i} \end{aligned}$$

then one has

$$\mathcal{L}V_N \leq -cV_N + d.$$

Therefore, the signals \tilde{x}_i , z_i , and $\tilde{\theta}_i$ are bounded in probability. As θ_i is a constant, $\hat{\theta}_i$ is also bounded in probability. Now, it can be shown that all the signals in the closed-loop system are semiglobally uniformly ultimately bounded in probability, which are the desired results, and the proof is completed.

Remark 3: In the backstepping design procedure, the dynamic surface control technique is successfully applied to large-scale stochastic nonlinear systems. In the controller design process, the repeated differentiation of virtual control α_i is avoided by replacing α_i with $\dot{\alpha}_{i+1f}$, and α_{i+1f} is defined by a first-order filter with α_i as input.

Remark 4: In most of the neural adaptive control design process, the number of the adaptation parameters depends on the number of the NN nodes. Consequently, if a system contains a large number of unknown nonlinear functions or if more NN nodes are used to improve the approximation precision, a large number of adaptation parameters will be needed to be updated online. In this paper, we estimated the norm of all the weight vectors but not each weight vector; therefore, only one adaptation learning law is required to control each subsystem.

IV. SIMULATION RESULTS

In this section, we will exploit a simulation example to demonstrate the effectiveness of the proposed adaptive NN control method.

Consider the following large-scale stochastic nonlinear systems:

$$\begin{aligned} dx_{1,1} &= (x_{1,2} + f_{1,1} + h_{1,1})dt + g_{1,1}dw_1 \\ dx_{1,2} &= (u_1 + f_{1,2} + h_{1,2})dt + g_{1,2}dw_1 \\ y_1 &= x_{1,1} \\ dx_{2,1} &= (x_{2,2} + f_{2,1} + h_{2,1})dt + g_{2,1}dw_2 \\ dx_{2,2} &= (u_2 + f_{2,2} + h_{2,2})dt + g_{2,2}dw_2 \\ y_2 &= x_{2,1} \end{aligned}$$

where the nonlinear functions are $f_{1,1} = -100x_{1,1}$, $f_{1,2} = x_{1,2} \sin(x_{1,1})$, $f_{2,1} = 3x_{2,1} \cos(0.2/x_{2,1})$, and $f_{2,2} = -x_{2,2} \sin(x_{2,1})$; the interconnection functions are $h_{1,1} = \cos(y_1)y_2$, $h_{1,2} = -y_1 \sin(y_2)$, $h_{2,1} = \sin(y_1)y_2$, and $h_{2,2} = \cos(y_1)y_2$; the stochastic disturbance functions are $g_{1,1} = \sin(y_1)$, $g_{1,2} = \cos(y_1)$, $g_{2,1} = \sin(y_2)$, and $g_{2,2} = \cos(y_2)$; and the initial states are chosen as $x_{1,1}(0) = 0.2$, $x_{1,2}(0) = 0.3$, $x_{2,1}(0) = 0.5$, and $x_{2,2}(0) = 0.4$. The observer is designed as

$$\begin{aligned} \dot{\hat{x}}_{1,1} &= \hat{x}_{1,2} + l_{1,1}(x_{1,1} - \hat{x}_{1,1}) \\ \dot{\hat{x}}_{1,2} &= u_1 + l_{1,2}(x_{1,1} - \hat{x}_{1,1}) \\ \dot{\hat{x}}_{2,1} &= \hat{x}_{2,2} + l_{2,1}(x_{2,1} - \hat{x}_{2,1}) \\ \dot{\hat{x}}_{2,2} &= u_2 + l_{2,2}(x_{2,1} - \hat{x}_{2,1}). \end{aligned}$$

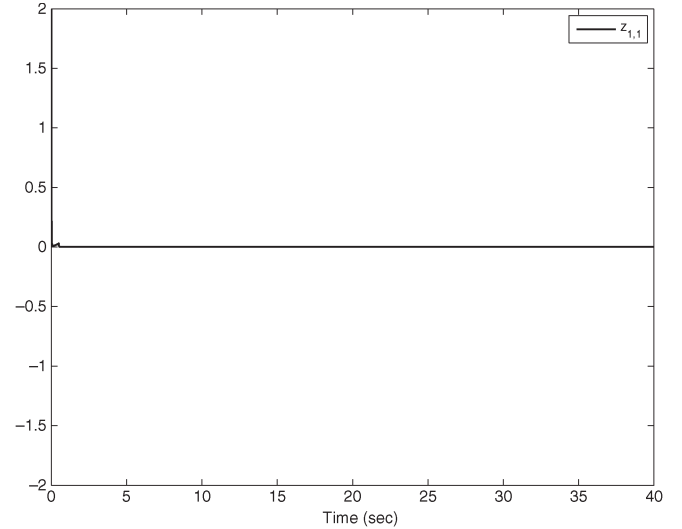


Fig. 1. Trajectory of system output y_1 .

According to Theorem 1, the virtual control function $\alpha_{1,1}$, $\alpha_{2,1}$ and the true control law u_1 , u_2 are chosen respectively as

$$\begin{aligned} \alpha_{1,1} &= -\frac{1}{2a_{1,1}^2} z_{1,1}^3 \hat{\theta}_1, & u_1 &= -\frac{1}{2a_{1,2}^2} z_{1,2}^3 \hat{\theta}_1 \\ \alpha_{2,1} &= -\frac{1}{2a_{2,1}^2} z_{2,1}^3 \hat{\theta}_2, & u_2 &= -\frac{1}{2a_{2,2}^2} z_{2,2}^3 \hat{\theta}_2 \end{aligned} \quad (31)$$

where $z_{1,1} = y_1$, $z_{1,2} = \hat{x}_{1,2} - \alpha_{1,2,f}$, $z_{2,1} = y_2$, and $z_{2,2} = \hat{x}_{2,2} - \alpha_{2,2,f}$. The adaptive laws are given as

$$\begin{aligned} \dot{\hat{\theta}}_1 &= \sum_{j=1}^2 \frac{r_1}{2a_{1,j}^2} z_{1,j}^6 - k_{1,0} \hat{\theta}_1 \\ \dot{\hat{\theta}}_2 &= \sum_{j=1}^2 \frac{r_2}{2a_{2,j}^2} z_{2,j}^6 - k_{2,0} \hat{\theta}_2. \end{aligned} \quad (32)$$

In the simulation, the design parameters are chosen as $l_{1,1} = l_{1,2} = l_{2,1} = l_{2,2} = 50$, $a_{1,1} = a_{1,2} = 0.13$, $a_{2,1} = a_{2,2} = 0.115$, $r_{1,1} = r_{1,2} = 20.5$, $r_{2,1} = r_{2,2} = 30.5$, $k_{1,0} = k_{2,0} = 0.01$, $\kappa_{1,2} = 0.06$, and $\kappa_{2,2} = 0.001$. The simulation results are illustrated in Figs. 1–8, respectively. Figs. 1 and 2 show the system output y_1 and y_2 . Fig. 3 and 4 illustrate the new state variables $\alpha_{1,2,f}$ and $\alpha_{2,2,f}$ of the first-order filters. Figs. 5 and 6 depict the trajectories of input u_1 and u_2 , whereas Figs. 7 and 8 illustrate the trajectories of adaptive parameter $\hat{\theta}_1$ and $\hat{\theta}_2$.

Remark 5: From Figs. 1–8, we can see that the system output y_1 and y_2 can converge to a small neighborhood around the origin. In addition, the filter signals $\alpha_{1,2,f}$ and $\alpha_{2,2,f}$, control input u_1 and u_2 , and the adaptive parameter $\hat{\theta}_1$ and $\hat{\theta}_2$ are all bounded. The presented simulation results illustrate the effectiveness of the adaptive dynamic surface control approach proposed in this paper.

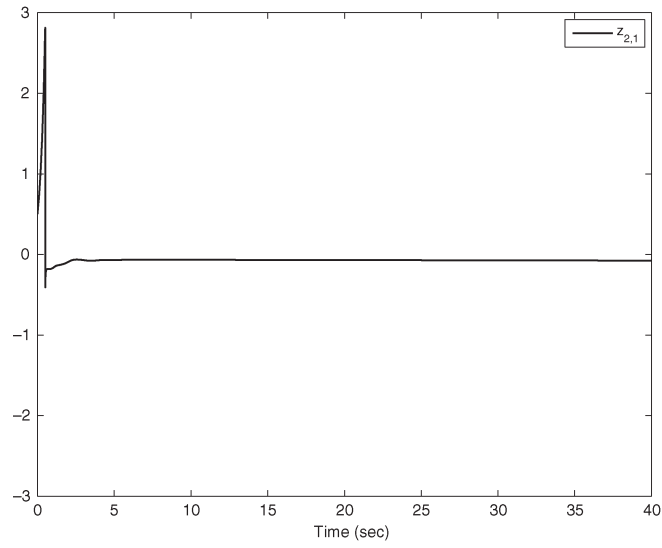


Fig. 2. Trajectory of system output y_2 .

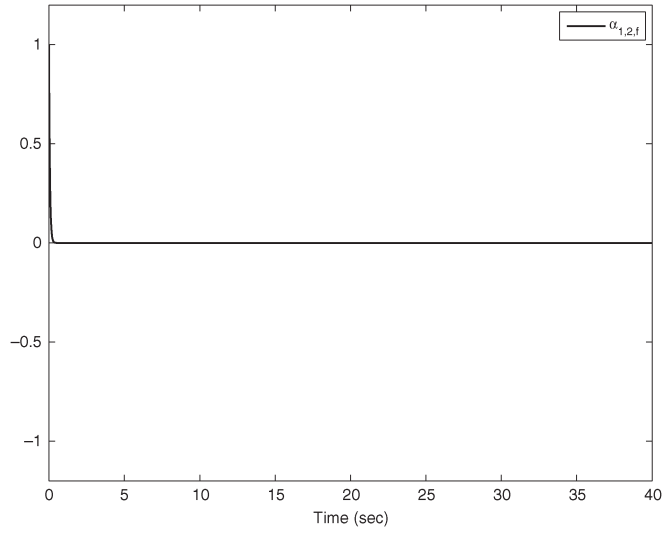


Fig. 3. Trajectory of a state variable of a first-order filter $\alpha_{1,2,f}$.

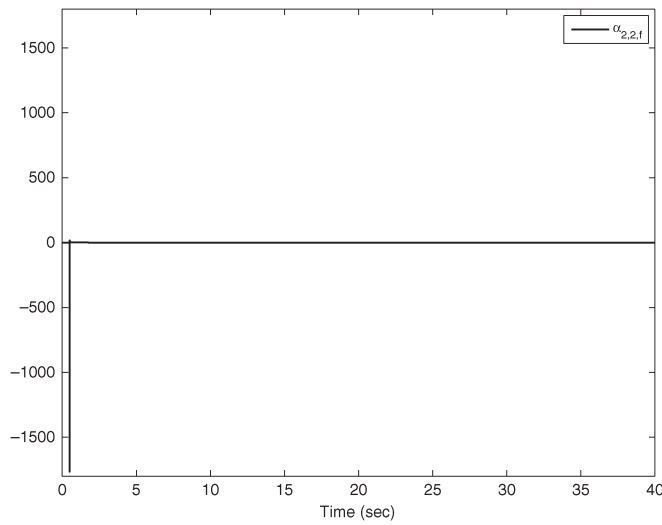


Fig. 4. Trajectory of a state variable of a first-order filter $\alpha_{2,2,f}$.

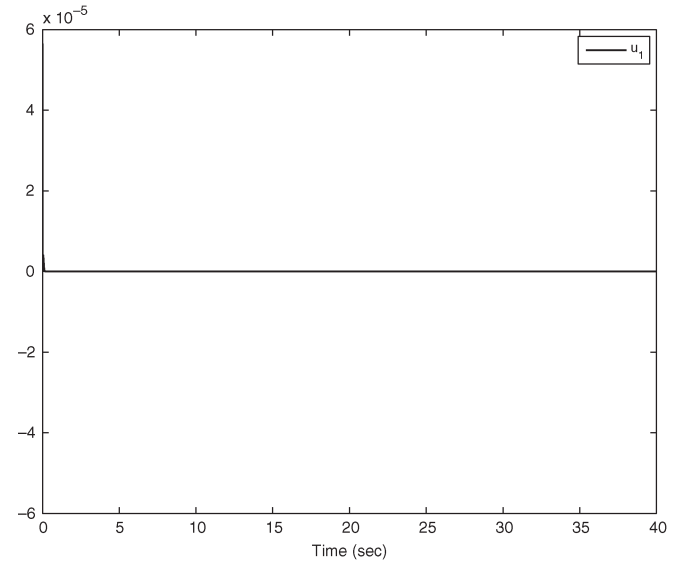


Fig. 5. Trajectory of control input u_1 .

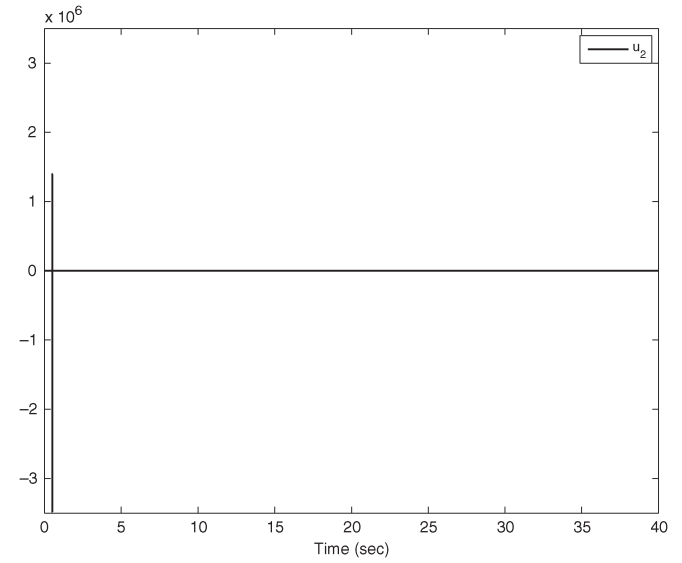


Fig. 6. Trajectory of control input u_2 .

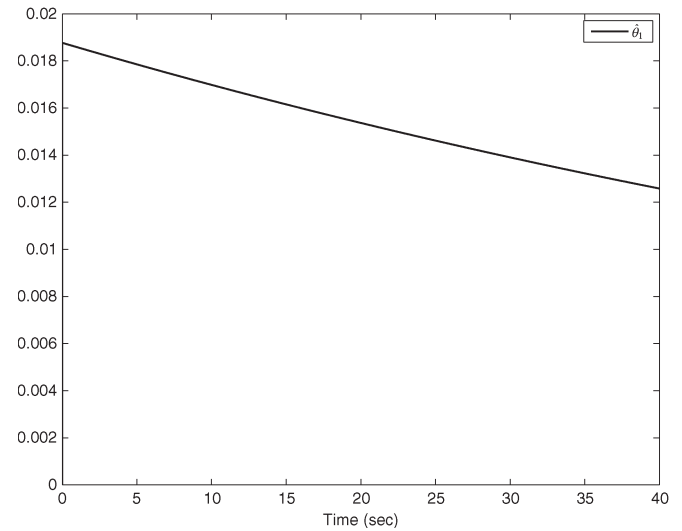


Fig. 7. Adaptive parameter $\hat{\theta}_1$.

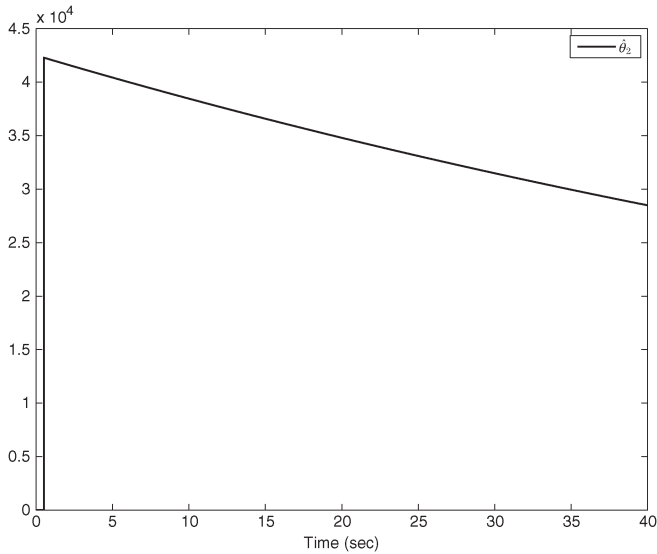


Fig. 8. Adaptive parameter $\hat{\theta}_2$.

V. CONCLUSION

In this paper, a decentralized adaptive NN output-feedback control design method has been proposed for a class of large-scale stochastic nonlinear systems. Direct adaptive NN control method has been used to approximate the unknown nonlinear functions, in which the number of on-line adaptive parameters is only one; therefore, the computation burden can be significantly reduced. In addition, a state observer has been designed to estimate the unmeasured states. In order to overcome the problem of explosion of complexity, a dynamic surface control method has been applied in the large-scale stochastic nonlinear systems. It is shown that all the signals in the closed-loop system are semiglobally uniformly ultimately bounded. Finally, a numerical example has been given to illustrate the effectiveness of the proposed design technique.

REFERENCES

- [1] N. Sandell, Jr, P. Varaiya, M. Athans, and M. Safonov, "Survey of decentralized control methods for large scale systems," *IEEE Trans. Autom. Control*, vol. 23, no. 2, pp. 108–128, Apr. 1978.
- [2] D. Siljak, *Large-Scale Dynamic Systems: Stability and Structure*. Amsterdam, The Netherlands: North-Holland, 1978.
- [3] M. Mahmoud, *Decentralized Control and Filtering in Interconnected Dynamical Systems*. Boca Raton, FL: CRC Press, 2011.
- [4] M. Mahmoud, *Decentralized Systems With Design Constraints*. New York: Springer-Verlag, May 2011.
- [5] M. Mahmoud, "Decentralized stabilization of interconnected systems with time-varying delays," *IEEE Trans. Autom. Control*, vol. 54, no. 11, pp. 2663–2668, Nov. 2009.
- [6] J. Lunze, *Feedback Control of Large Scale Systems*. Englewood Cliffs, NJ: Prentice-Hall, 1992.
- [7] Y. Guo, Z. Jiang, and D. Hill, "Decentralized robust disturbance attenuation for a class of large-scale nonlinear systems," *Syst. Control Lett.*, vol. 37, no. 2, pp. 71–85, Jun. 1999.
- [8] S. Tong, C. Liu, Y. Li, and H. Zhang, "Adaptive fuzzy decentralized control for large-scale nonlinear systems with time-varying delays and unknown high-frequency gain sign," *IEEE Trans. Syst., Man, Cybern. B, Cybern.*, vol. 41, no. 2, pp. 474–485, Apr. 2011.
- [9] Z. Jiang, D. Reppinger, and D. Hill, "Decentralized nonlinear output-feedback stabilization with disturbance attenuation," *IEEE Trans. Autom. Control*, vol. 46, no. 10, pp. 1623–1629, Oct. 2001.
- [10] S. Mehraeen, S. Jagannathan, and M. Crow, "Decentralized dynamic surface control of large-scale interconnected systems in strict-feedback form using neural networks with asymptotic stabilization," *IEEE Trans. Neural Netw.*, vol. 22, no. 11, pp. 1709–1722, Nov. 2011.
- [11] Z. Wang, D. Ho, H. Dong, and H. Gao, "Robust H_∞ finite-horizon control for a class of stochastic nonlinear time-varying systems subject to sensor and actuator saturations," *IEEE Trans. Autom. Control*, vol. 55, no. 7, pp. 1716–1722, Jul. 2010.
- [12] H. Gao, J. Lam, and C. Wang, "Robust energy-to-peak filter design for stochastic time-delay systems," *Syst. Control Lett.*, vol. 55, no. 2, pp. 101–111, Feb. 2006.
- [13] H. Li, H. Gao, and P. Shi, "New passivity analysis for neural networks with discrete and distributed delays," *IEEE Trans. Neural Netw.*, vol. 21, no. 11, pp. 1842–1847, Nov. 2010.
- [14] L. Wu and D. Ho, "Fuzzy filter design for Itô stochastic systems with application to sensor fault detection," *IEEE Trans. Fuzzy Syst.*, vol. 17, no. 1, pp. 233–242, Feb. 2009.
- [15] P. Shi, Y. Xia, G. Liu, and D. Rees, "On designing of sliding-mode control for stochastic jump systems," *IEEE Trans. Autom. Control*, vol. 51, no. 1, pp. 97–103, Jan. 2006.
- [16] M. Karan, P. Shi, and C. Kaya, "Transition probability bounds for the stochastic stability robustness of continuous-and discrete-time Markovian jump linear systems," *Automatica*, vol. 42, no. 12, pp. 2159–2168, Dec. 2006.
- [17] R. Yang, H. Gao, and P. Shi, "Novel robust stability criteria for stochastic hopfield neural networks with time delays," *IEEE Trans. Syst., Man, Cybern. B, Cybern.*, vol. 39, no. 2, pp. 467–474, Apr. 2009.
- [18] H. Dong, Z. Wang, and H. Gao, "Robust H_∞ filtering for a class of nonlinear networked systems with multiple stochastic communication delays and packet dropouts," *IEEE Trans. Signal Process.*, vol. 58, no. 4, pp. 1957–1966, Apr. 2010.
- [19] H. Li, B. Chen, Q. Zhou, and W. Qian, "Robust stability for uncertain delayed fuzzy hopfield neural networks with Markovian jumping parameters," *IEEE Trans. Syst., Man, Cybern. B, Cybern.*, vol. 39, no. 1, pp. 94–102, Feb. 2009.
- [20] H. Zhang and Y. Wang, "Stability analysis of Markovian jumping stochastic Cohen-Grossberg neural networks with mixed time delays," *IEEE Trans. Neural Netw.*, vol. 19, no. 2, pp. 366–370, Feb. 2008.
- [21] Z. Wu, X. Xie, P. Shi, and Y. Xia, "Backstepping controller design for a class of stochastic nonlinear systems with Markovian switching," *Automatica*, vol. 45, no. 4, pp. 997–1004, Apr. 2009.
- [22] Y. Yin, P. Shi, and F. Liu, "Gain-scheduled robust fault detection on time-delay stochastic nonlinear systems," *IEEE Trans. Ind. Electron.*, vol. 58, no. 10, pp. 4908–4916, Oct. 2011.
- [23] W. Li, Y. Jing, and S. Zhang, "Output-feedback stabilization for stochastic nonlinear systems whose linearizations are not stabilizable," *Automatica*, vol. 46, no. 4, pp. 752–760, Apr. 2010.
- [24] W. Li, Y. Jing, and S. Zhang, "Adaptive state-feedback stabilization for a large class of high-order stochastic nonlinear systems," *Automatica*, vol. 47, no. 4, pp. 819–828, Apr. 2011.
- [25] Q. Zhou and P. Shi, "A new approach to network-based H_∞ control for stochastic systems," *Int. J. Robust Nonlinear Control*, 2011, DOI: 10.1002/rnc.1750.
- [26] S. Xie and L. Xie, "Decentralized stabilization of a class of interconnected stochastic nonlinear systems," *IEEE Trans. Autom. Control*, vol. 45, no. 1, pp. 132–137, Jan. 2000.
- [27] S. Liu, J. Zhang, and Z. Jiang, "Decentralized adaptive output-feedback stabilization for large-scale stochastic nonlinear systems," *Automatica*, vol. 43, no. 2, pp. 238–251, Feb. 2007.
- [28] B. Chen, X. Liu, K. Liu, and C. Lin, "Direct adaptive fuzzy control of nonlinear strict-feedback systems," *Automatica*, vol. 45, no. 6, pp. 1530–1535, Jun. 2009.
- [29] S. Tong and Y. Li, "Observer-based fuzzy adaptive control for strict-feedback nonlinear systems," *Fuzzy Sets Syst.*, vol. 160, no. 12, pp. 1749–1764, Jun. 2009.
- [30] S. Tong, X. He, and H. Zhang, "A combined backstepping and small-gain approach to robust adaptive fuzzy output feedback control," *IEEE Trans. Fuzzy Syst.*, vol. 17, no. 5, pp. 1059–1069, Oct. 2009.
- [31] B. Chen, X. Liu, K. Liu, and C. Lin, "Fuzzy approximation-based adaptive control of strict-feedback nonlinear systems with time delays," *IEEE Trans. Fuzzy Syst.*, vol. 18, no. 5, pp. 883–892, Oct. 2010.
- [32] Q. Zhou, P. Shi, J. Lu, and S. Xu, "Adaptive output feedback fuzzy tracking control for a class of nonlinear systems," *IEEE Trans. Fuzzy Syst.*, vol. 19, no. 5, pp. 972–982, Oct. 2011.
- [33] H. Zhang, Z. Wang, and D. Liu, "Global asymptotic stability of neural networks with multiple time-varying delays," *IEEE Trans. Neural Netw.*, vol. 19, no. 5, pp. 855–873, May 2008.

[34] S. Tong, Y. Li, and Y. Li, "Observer-based adaptive fuzzy backstepping control for a class of stochastic nonlinear strict-feedback systems," *IEEE Trans. Syst., Man, Cybern. B, Cybern.*, vol. 41, no. 6, pp. 1693–1704, Dec. 2011.

[35] H. Zhang and Y. Quan, "Modeling, identification and control of a class of nonlinear system," *IEEE Trans. Fuzzy Syst.*, vol. 9, no. 2, pp. 349–354, Apr. 2001.

[36] W. Chen, L. Jiao, J. Li, and R. Li, "Adaptive nn backstepping output-feedback control for stochastic nonlinear strict-feedback systems with time-varying delays," *IEEE Trans. Syst., Man, Cybern. B, Cybern.*, vol. 40, no. 3, pp. 939–950, Jun. 2010.

[37] B. Chen and X. Liu, "Fuzzy approximate disturbance decoupling of MIMO nonlinear systems by backstepping and application to chemical processes," *IEEE Trans. Fuzzy Syst.*, vol. 13, no. 6, pp. 832–847, Dec. 2005.

[38] B. Chen, S. Tong, and X. Liu, "Fuzzy approximate disturbance decoupling of MIMO nonlinear systems by backstepping approach," *Fuzzy Sets Syst.*, vol. 158, no. 10, pp. 1097–1125, May 2007.

[39] Y. Li, C. Yang, S. Ge, and T. Lee, "Adaptive output feedback nn control of a class of discrete-time mimo nonlinear systems with unknown control directions," *IEEE Trans. Syst., Man, Cybern. B, Cybern.*, vol. 41, no. 2, pp. 507–517, Apr. 2011.

[40] S. Tong, Y. Li, G. Feng, and T. Li, "Observer-based adaptive fuzzy backstepping dynamic surface control for a class of mimo nonlinear systems," *IEEE Trans. Syst., Man, Cybern. B, Cybern.*, vol. 41, no. 4, pp. 1124–1135, Aug. 2011.

[41] W. Chen and J. Li, "Decentralized output-feedback neural control for systems with unknown interconnections," *IEEE Trans. Syst., Man, Cybern. B, Cybern.*, vol. 38, no. 1, pp. 258–266, Feb. 2008.

[42] S. Tong, H. Li, and G. Chen, "Adaptive fuzzy decentralized control for a class of large-scale nonlinear systems," *IEEE Trans. Syst., Man, Cybern. B, Cybern.*, vol. 34, no. 1, pp. 770–775, Feb. 2004.

[43] S. Yoo and J. Park, "Neural-network-based decentralized adaptive control for a class of large-scale nonlinear systems with unknown time-varying delays," *IEEE Trans. Syst., Man, Cybern. B, Cybern.*, vol. 39, no. 5, pp. 1316–1323, Oct. 2009.

[44] D. Wang and J. Huang, "Neural network-based adaptive dynamic surface control for a class of uncertain nonlinear systems in strict-feedback form," *IEEE Trans. Neural Netw.*, vol. 16, no. 1, pp. 195–202, Jan. 2005.

[45] W. Chen, "Adaptive backstepping dynamic surface control for systems with periodic disturbances using neural networks," *IET Control Theory Appl.*, vol. 3, no. 10, pp. 1383–1394, Oct. 2009.


[46] B. Song, "Robust stabilization of decentralized dynamic surface control for a class of interconnected nonlinear systems," *Int. J. Control, Autom. Syst.*, vol. 5, no. 2, pp. 138–146, Apr. 2007.

[47] J. Li, W. Chen, and J. Li, "Adaptive NN output-feedback decentralized stabilization for a class of large-scale stochastic nonlinear strict-feedback systems," *Int. J. Robust Nonlinear Control*, vol. 21, no. 4, pp. 452–472, Mar. 2011.



Qi Zhou received the B.S. and M.S. degrees in mathematics from Bohai University, Jinzhou, China, in 2006 and 2009, respectively. She is currently working toward the Ph.D. degree with the International Collaboration Program, University of Portsmouth, Portsmouth, U.K., and with Nanjing University of Science and Technology, Nanjing, China.

Her research interest includes fuzzy control, stochastic control, and robust control.



Peng Shi (SM'97) received the B.Sc. degree in mathematics from Harbin Institute of Technology, Harbin, China, in 1982, the M.E. degree in systems engineering from Harbin Engineering University, Harbin, in 1985; the Ph.D. degree in electrical engineering from The University of Newcastle, Newcastle, Australia, in 1994, the Ph.D. degree in mathematics from the University of South Australia, Adelaide, Australia, in 1998, and the D.Sc. degree from the University of Glamorgan, Pontypridd, U.K., in 2006.

From 1985 to 1989, he was a Lecturer with Heilongjiang University, Harbin and from 1997 to 1999, with the University of

South Australia. From 1999 to 2005, he was a Senior Scientist with the Defence Science and Technology Organisation, Department of Defence, Australia. In 2004, he joined the University of Glamorgan as a Professor. Since 2006, he has been an Adjunct Professor with the University of South Australia. Since 2008, he has also been a Professor with Victoria University, Melbourne, Australia. He is the author of five monographs. His research interests include system and control theory, computational and intelligent systems, and operational research.

Dr. Shi is a Fellow of the Institute of Engineering and Technology (U.K.), a Fellow of the Institute of Mathematics and its Applications (U.K.), and a Senior Member of the Institute of Electrical and Electronic Engineers (USA). He is currently the Editor-in-Chief of *International Journal of Innovative Computing, Information and Control* and the Associate Editor for a number of journals, including *IEEE TRANSACTIONS ON AUTOMATIC CONTROL*, *IEEE TRANSACTIONS ON SYSTEMS, MAN AND CYBERNETICS-PART B*, and *IEEE TRANSACTIONS ON FUZZY SYSTEM*. He was the recipient of the Most Cited Paper Award of Signal Processing in 2009.



Honghai Liu (M'02–SM'06) received the Ph.D. degree in intelligent robotics from King's College, London, U.K., in 2003.

He previously held research appointments with the University of London and the University of Aberdeen, and project leader appointments in large-scale industrial control and system integration industry. He is currently a Professor of intelligent systems with the University of Portsmouth, Portsmouth, U.K. He is the author of numerous peer-reviewed international journals and conference papers. His research

interests include approximate computation, pattern recognition, multisensor-based information analytics, and intelligent robotics and their applications, particularly in cognition-driven biomechanics and information abstraction, with an emphasis on approaches that could make contribution to the intelligent connection of perception to action using contextual information.

Dr. Liu is a Fellow of IET. He was the recipient of four Best Paper Awards.



Shengyuan Xu received the B.Sc. degree from the Hangzhou Normal University, Hangzhou, China in 1990, the M.Sc. degree from the Qufu Normal University, Qufu, China, in 1996, and the Ph.D. degree from the Nanjing University of Science and Technology, Nanjing, China, in 1999.

From 1999 to 2000, he was a Research Associate with the Department of Mechanical Engineering, The University of Hong Kong, Pokfulam, Hong Kong. From December 2000 to November 2001, he was a Postdoctoral Researcher with Center for Sys-

tems Engineering and Applied Mechanics, Universite Catholique de Louvain, Louvain-la-Neuve, Belgium, and from December 2001 to September 2002, with the Department of Electrical and Computer Engineering, University of Alberta, Edmonton, AB, Canada. From September 2002 to September 2003 and from September 2003 to September 2004, he was a William Mong Young Researcher and an Honorary Associate Professor, respectively, both in the Department of Mechanical Engineering, The University of Hong Kong. Since November 2002, he has been with the School of Automation, Nanjing University of Science and Technology as a Professor. His current research interests include robust filtering and control, singular systems, time-delay systems, neural networks, and multidimensional and nonlinear systems.

Dr. Xu is a member of the Editorial Boards of the *Multidimensional Systems and Signal Processing*, and the *Circuits Systems and Signal Processing*. He was a recipient of the National Excellent Doctoral Dissertation Award in 2002 from the Ministry of Education of China. He obtained a grant from the National Science Foundation for Distinguished Young Scholars of P. R. China in 2006. He was the recipient of a Cheung Kong Professorship in 2008 from the Ministry of Education of China.